




# LAMINATION TYPE 187LE

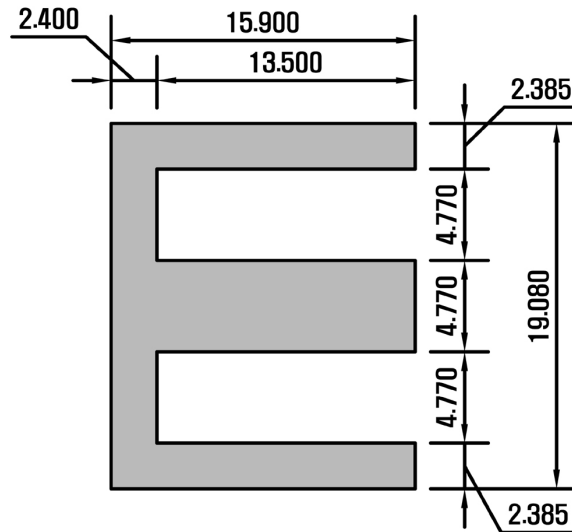

TOLERANCE  $\pm 0.08\text{mm}$

## PROPERTIES OF SQUARE STACK

### MAGNETIC DESIGN FORMULAE

$$B_{\text{max}} = 1253 \times 10^3 / K_1 N (\text{gauss per Volt at 60 Cycle})$$

( N is number of turns )

$$H_o = (0.304 \times 10^{-3}) N \text{ Oersted per milliampere}$$

of direct current in windin

$$L = (0.0842 \times 10^{-8}) K_1 N^2 \mu \text{ ac Henries}$$

### MAGNETIC PATH Dimension

$$l = 4.13\text{cm}$$

$$A = 0.227\text{cm}^2$$

### K<sub>1</sub> (STACKING FACTOR)

|  | Thickness | Butt jointed | Interleaved one per layer |
|--|-----------|--------------|---------------------------|
|  | 0.1       | .90          | .80                       |
|  | 0.2       | .90          | .85                       |
|  | 0.35      | .95          | .90                       |

| MATERIAL TYPE | THICKNESS(mm) | WEIGHT AND COUNT |        |
|---------------|---------------|------------------|--------|
|               |               | g/pcs            | pcs/kg |
| PC(Ni80)      | 0.35t         | 0.535            | 1,869  |
|               | 0.2t          | 0.305            | 3,278  |
| PB(Ni45)      | 0.35t         | 0.504            | 1,984  |