




# LAMINATION TYPE 41EI

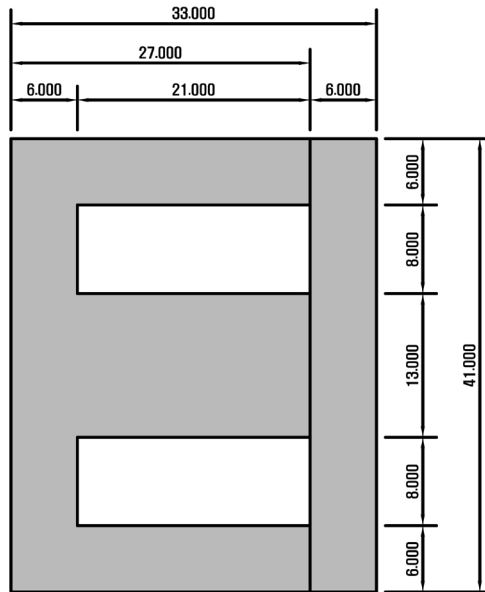

TOLERANCE  $\pm 0.08\text{mm}$

## PROPERTIES OF SQUARE STACK

### MAGNETIC DESIGN FORMULAE

$$B_{\text{max}} = 407 \times 10^3 / K_1 N (\text{gauss per Volt at 60 Cycle})$$

( N is number of turns )

$$H_o = (0.170 \times 10^{-3}) N \text{ Oersted per milliampere}$$

of direct current in windin

$$L = (0.156 \times 10^{-8}) K_1 N^2 \mu \text{ ac Henries}$$

### MAGNETIC PATH Dimension

$$l = 7.4\text{cm}$$

$$A = 0.922\text{cm}^2$$

### K<sub>1</sub> (STACKING FACTOR)

Thickness	Butt jointed	Interleaved one per layer
0.1	.90	.80
0.2	.90	.85
0.35	.95	.90

MATERIAL TYPE	THICKNESS(mm)	WEIGHT AND COUNT	
		g/pair	pairs/kg
PC(Ni80)	0.35t	2.243	445
PB(Ni45)	0.35t	2.114	473