




# TAPE WOUND CORES

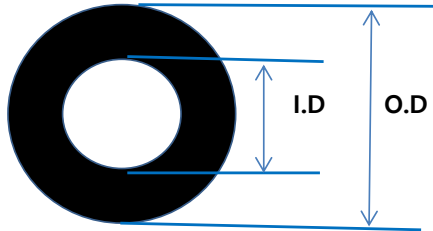

- \* O.D : Outer Diameter
- \* I.D : Inner Diameter
- \* W : Width
- \* Tolerance :  $\pm 0.05\text{mm}$

## Dimension Available

Material Thickness	Core Dimension		
	O. D	I. D	Width
0.07t	More than 15mm	More than 10mm	More than 5mm
0.1t	More than 15mm	More than 10mm	More than 5mm
0.15t, 0.195t	More than 15mm	More than 13mm	More than 5mm

## AC Magnetic Performance

Permeability	PC 0.07t	PC 0.1t	PC 0.15t	PC 0.195t
Frequency	60Hz	60Hz	60Hz	60Hz
40 Gauss (4mT)	90,000 Min.	80,000 Min.	55,000 Min.	55,000 Min.
200 Gauss (20mT)	110,000 Min.	95,000 Min.	75,000 Min.	75,000 Min.
2,000 Gauss (0.2T)	200,000 Min.	160,000 Min.	115,000 Min.	115,000 Min.
0.4 A/m	100,000 Min.	100,000 Min.	60,000 Min.	60,000 Min.

## \* Material Suppliers

1. VAC in Germany
2. Auerhammer Metallwerk GmbH in Germany
3. Carpenter in USA